



Instant Capture

12x Optical Zoom
0.2Lux Ultra-Low Light Sensitivity



SCP-2120

12x High Resolution PTZ Dome Camera

- 12x optical zoom (3.9 ~ 46mm), 0.2Lux ultra-low light sensitivity
- Features samsung's W-V DSP chipset
- 1/4" 600TV lines high resolution & coax communication
- 360° continuous rotation, high-speed pan & tilt at 650°/sec





12x High Resolution PTZ Dome Camera | SCP-2120

Captured Before You Know It

650° Per Second High-Speed Pan & Tilt for Fast, Accurate Monitoring

SCP-2120



650°/sec

650°/sec High-Speed Pan & Tilt



With high-speed pan and tilt operations at 650° per second, the SCP-2120 captures broad areas quickly and accurately.

Why Choose the SCP-2120



12x Optical Zoom



Equipped with a 12x auto-focus zoom (3.9 ~ 46mm) and a 16x digital zoom, the SCP-2120 achieves a maximum of 192x combined zoom for fast and accurate monitoring.



Normal



Optical 12x Zoom

600TV lines High Resolution



Samsung's proprietary W-V chipset allows this camera to capture 600TV lines resolution color images or 700TV lines resolution B/W images with superior clarity.



Conventional Camera




SCP-2120


0.2Lux Ultra-Low Light Levels



With ultra-low light levels of 0.2Lux, the SCP-2120 clearly captures objects in very dark conditions down to 0.2Lux.



Conventional Camera



SCP-2120

Discreet Design



Encased in a flush-type chassis and colored simple white, the SCP-2120 can be ceiling-mounted to perfectly blend in with any interior design for discreet monitoring.



255 Presets




The SCP-2120 is capable of storing up to 255 preset positions.

COAX Communications System & SSNRⅢ



The camera OSD can be accessed remotely via coaxial control, while Samsung's super noise reduction technology (SSNRⅢ) achieves a noise-free 52dB S/N ratio.




12x High Resolution PTZ Dome Camera

SCP-2120



Dimensions

Unit : mm (inch)

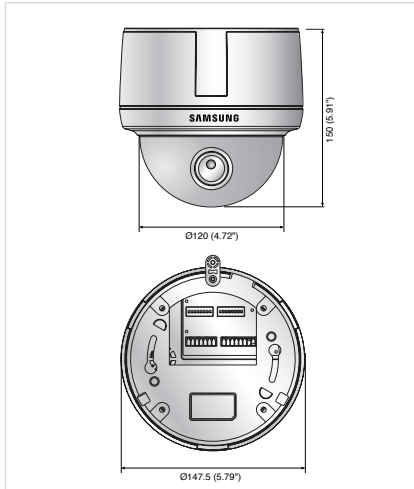

Controller (Option)



The **Eco mark** represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Specifications

	SCP-2120N (NTSC)		SCP-2120P (PAL)
ELECTRICAL			
Input Voltage	24V AC ±10%		
Power Consumption	Max. 12W		
VIDEO			
Imaging Device	1/4" Super HAD CCD		
Total Pixels	811(H) x 508(V)	795(H) x 596(V)	
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)	
Scanning System	2 : 1 Interlace		
Synchronization	Internal / AC line lock		
Frequency	H : 15.734KHz / V : 59.94Hz	H : 15.625KHz / V : 50Hz	
Horizontal Resolution	Color : 600TV lines (Min.) / B/W : 700TV lines (Min.)		
Min. Illumination	Color : 0.2Lux (50 IRE@F1.67), 0.0004Lux (Sens-up, 512X) / B/W : 0.004Lux (50 IRE@F1.67)		
S / N (Y signal)	52dB		
Video Output	CVBS : 1.0Vp-p / 75 composite		
LENS			
Zoom Ratio	12x (Optical), 16x (Digital)		
Focal Length	3.9 ~ 46mm (F1.65 ~ 1.88)		
Max. Aperture Ratio	1 : 1.65(Wide) ~ 1.88(Tele)		
Min. Object Distance	1.8m (5.91ft)		
Angular Field of View	H : 51.54°(Wide) ~ 4.49°(Tele) / V : 39.28°(Wide) ~ 3.39°(Tele)		
Focus	Auto / Manual / One-push		
Zoom Movement Speed	1.9sec		
Iris Control	Auto / Manual		
PAN / TILT			
Pan Range	360° Endless		
Pan Speed	Preset : 650°/sec / Manual : 0.024°/sec ~ 120°/sec (Proportional zoom ratio)		
Tilt Range	-5° ~ 185°		
Tilt Speed	Preset : 650°/sec / Manual : 0.024°/sec ~ 120°/sec (Proportional zoom ratio)		
Preset Positions	255		
Preset Accuracy	±0.1°		
PTZ Mode	Preset, Swing, Group, Tour		
OPERATIONAL			
On Screen Display	English, French, German, Spanish, Italian, Chinese, Portuguese, Korean		
Camera Title	On / Off (Displayed 15 characters)		
Day & Night	Auto (ICR) / Color / B/W		
SSDR	On / Off (Level adjustable)		
Backlight Compensation	BLC / HLC / Off		
Motion Detection	On / Off (8 Programmable zones)		
Digital Image Stabilization	On / Off		
Privacy Masking	On / Off (12 Programmable zones)		
2D+3D Noise Filter (SSNRⅢ)	On / Off (Level adjustable)		
Sens-up (Frame Integration)	Auto / Off (Selectable 2x ~ 512x)		
Gain Control	Low / High / Off		
White Balance	ATW (In) / ATW (Out) / Manual / AWC		
Electronic Shutter Speed	Auto (NTSC : 1/60 ~ 1/120,000sec, PAL : 1/50 ~ 1/120,000) / Manual / A.FLK		
Communication	RS-485, Coaxial control		
Protocol	Samsung-T, Samsung-E, Pelco-D, Pelco-P, Bosch, Honeywell, Vicon, Panasonic		
Alarm	2 In, 2 Out		
Auto Digital Flip	On / Off		
ENVIRONMENTAL			
Operating Temperature / Humidity	-10°C ~ +50°C (+14°F ~ +122°F) / 20% ~ 80% RH		
MECHANICAL			
Dimension (WxH)	Ø147.5 x 150mm (Ø5.79" x 5.91")		
Weight	1.065Kg (2.35 lb)		
Certifications	FCC (Class A), UL/cUL listed		CE (Class A), UL/cUL listed

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741 ~ 8749, 8752-8760 Fax : +82-31-8018-3745
www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA INC.
1480 Charles Willard St, Carson, CA 90746, UNITED STATES
Tel : +1-877-213-1222 Fax : +1-310-632-2195
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.
Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 0PS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.
No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788

■ DISTRIBUTED BY

